


01-24SERIES

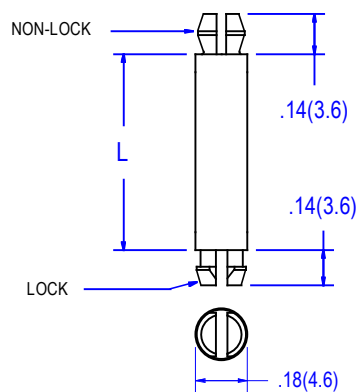

.152 ± .003 (3.86 ± 0.08) DIA. HOLE.
1/16 (1.6) PANEL THICKNESS, BOTH ENDS

ITEM NO.	DIM L	
	Inches ±.015	mm ±0.38
01-24-20	.125	3.2
01-24-30	.187	4.8
01-24-40	.250	6.4
01-24-50	.312	7.9
01-20-60	.375	9.5
01-24-70	.437	11.1
01-24-80	.500	12.7
01-24-90	.562	14.3
01-24-100	.625	15.9
01-24-110	.687	17.5
01-24-120	.750	19.1
01-24-130	.812	20.6
01-24-140	.875	22.2
01-24-160	1.00	25.4
01-24-180	1.13	28.6
01-24-200	1.25	31.7
01-24-220	1.38	34.9
01-24-240	1.5	38.1

PACKAGING: 1000 PCS PER BAG

MATERIAL	NYLON 66
UL RATING	94V-2
UL FILE NO.	R70062
COLOR	NATURAL
RoHS COMPLIANCE	YES
TEMP. RANGE (REF.)	-40 to 185°F (-40 to 85°C)
MR NUMBER	01

NYLON 66 RATED UL94V-0 AVAILABLE ON REQUEST.
TO ORDER ADD SUFFIX "X" TO PART NO.

ALL ELECTRONICS HARDWARE, INC. 2642 CORPORATE PARKWAY ALGONQUIN, IL. 60102 1-800-778-7234				PCB SUPPORT, single lock		10/23/20
No	Revision	Date	Init	File No.	01-24SERIES	